




SYNERGI+ FTXTM30M

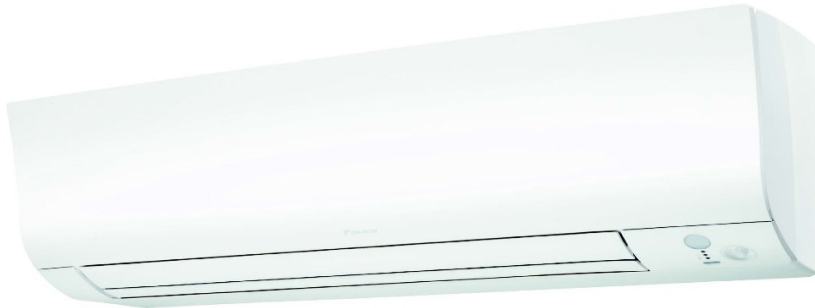

Energi-klasse	Årlig effektfaktor (Energieffektivitet)
A⁺⁺⁺	SCOP > 5,1
A⁺⁺	4,6 - 5,1
A⁺	4,0 - 4,6
A	3,4 - 4,0
B	3,1 - 3,4

SCOP (Årsvarmefaktor) 5,20 A+++

Maks Luftstrøm/ Luftmengde varme 594 m³/h

Varmekapasitet ved -15°C 4,80 kW

Varmekapasitet	Nom. (Min - Maks)	kW	3,20	0,80	7,40
COP		W/W			
Varmekapasitet ved -5°C	Nom.	kW	5,70		
Varmekapasitet ved -25°C		kW	3,60		
Inngangseffekt varmedrift	Nom. (Min - Maks)	kW	0,62		

Kjølekapasitet	Nom. (Min - Maks)	kW	3,00	1,2	4,60
SEER			8,70	A+++	
Inngangseffekt kjøledrift	Nom. (Min - Maks)	kW	0,62		

Innendørsenhet	FTXTM30M
H x B x D (mm)	294 x 811 x 272
Nettvekt (kg)	
Spennning (V)	230
Anbefalt sikring (A)/kontakt	16
Stikkontakt	Ute



Utendørsenhet	RXTM30N
H x B x D (mm)	605 x 930 x 376
Nettvekt (kg)	42 kg
Driftsområde Varme Min /Maks (°C)	-25 ~ +24
Driftsområde Kjøling Min /Maks (°C)	+16 ~ +43



Tilleggsinfo: