




# MITSUBISHI®

## KAITEKI UWANO 6300

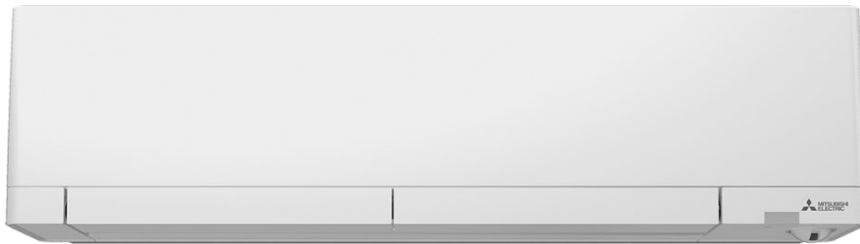

Energi-klasse	Årlig effektfaktor (Energieeffektivitet)
<b>A<sup>++</sup></b>	SCOP > 5,1
<b>A<sup>++</sup></b>	4,6 - 5,1
<b>A<sup>+</sup></b>	4,0 - 4,6
<b>A</b>	3,4 - 4,0
<b>B</b>	3,1 - 3,4

**SCOP (Årsvarmefaktor) 5,20 A+++**

**Maks Luftstrøm/ Luftmengde varme 846 m<sup>3</sup>/h**

**Varmekapasitet ved -15°C 4,80 kW**



Varmekapasitet	Nom. (Min - Maks)	kW	3,20	0,80	6,30
Varmekapasitet ved -15°C	Nom.	kW	4,80		
Varmekapasitet ved -25°C		KW	3,20		
Inngangseffekt varmedrift	Nom. (Min - Maks)	kW	0,58		

Kjølekapasitet	Nom. (Min - Maks)	kW	2,50	0,80	3,50
SEER			11,20	<b>A+++</b>	
Inngangseffekt kjøledrift	Nom. (Min - Maks)	kW	0,44		

### Innendørsenhet

H x B x D (mm)	305 x 998 x 247
Nettvekt (kg)	14,5
Spennning (V)	230
Anbefalt sikring (A)/kontakt	10



### Utendørsenhet

H x B x D (mm)	714 x 800 x 285
Nettvekt (kg)	39,5
Driftsområde Varme Min /Maks (°C)	-25 ~ +24
Driftsområde Kjøling Min /Maks (°C)	+16 ~ +43
Stikkontakt	Ute
Fabrikkgarantert varmekapasitet	-30 °C



### Tilleggsinfo:

WiFi