

TOSHIBA

VARMEPUMPER

DAISEKAI 9 RAS 25S




Energi-klasse	Årlig effektfaktor (Energieffektivitet)
A ⁺⁺	SCOP > 5,1
A ⁺	4,6 - 5,1
A	4,0 - 4,6
B	3,4 - 4,0

SCOP (Årsvarmefaktor)	5,33 A⁺⁺
Maks Luftstrøm/ Luftmengde	720 m ³ /h
Varmekapasitet ved -15°C	4,70 kW

Varmekapasitet	Nom. (Min - Maks)	kW	3,20	0,70	6,70
COP		W/W	5,33		
Varmekapasitet ved -7°C	Nom.	kW	5,20		
COP v/ -7 grader		W/W	3,60		
Inngangseffekt varmedrift	Nom. (Min - Maks)	kW	0,60	0,15	2,00

Kjølekapasitet	Nom. (Min - Maks)	kW	2,50	0,75	3,50
SEER			9,00	A ⁺⁺⁺	
Inngangseffekt kjøledrift	Nom. (Min - Maks)	kW	0,48	0,18	0,80

Innendørsenhet	RAS-25N4KVPG-ND
H x B x D (mm)	293 x 851 x 270
Nettvekt (kg)	14
Spennning (V)	230
Anbefalt sikring (A)/kontakt	16
Stikkontakt	Ute

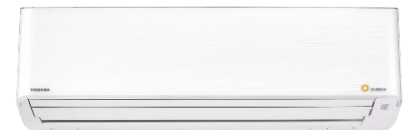

Utendørsenhet	RAS-25N4AVPG-ND
H x B x D (mm)	630 x 800 x 300
Nettvekt (kg)	46
Driftsområde Varme Min /Maks (°C)	-30 ~ +24
Driftsområde Kjøling Min /Maks (°C)	-10 ~ +46



Tilleggsinfo: Wifi som tilbehør